


Betonqualität
quality of concrete
min.C20/25
normal bewehrt
normal armouring

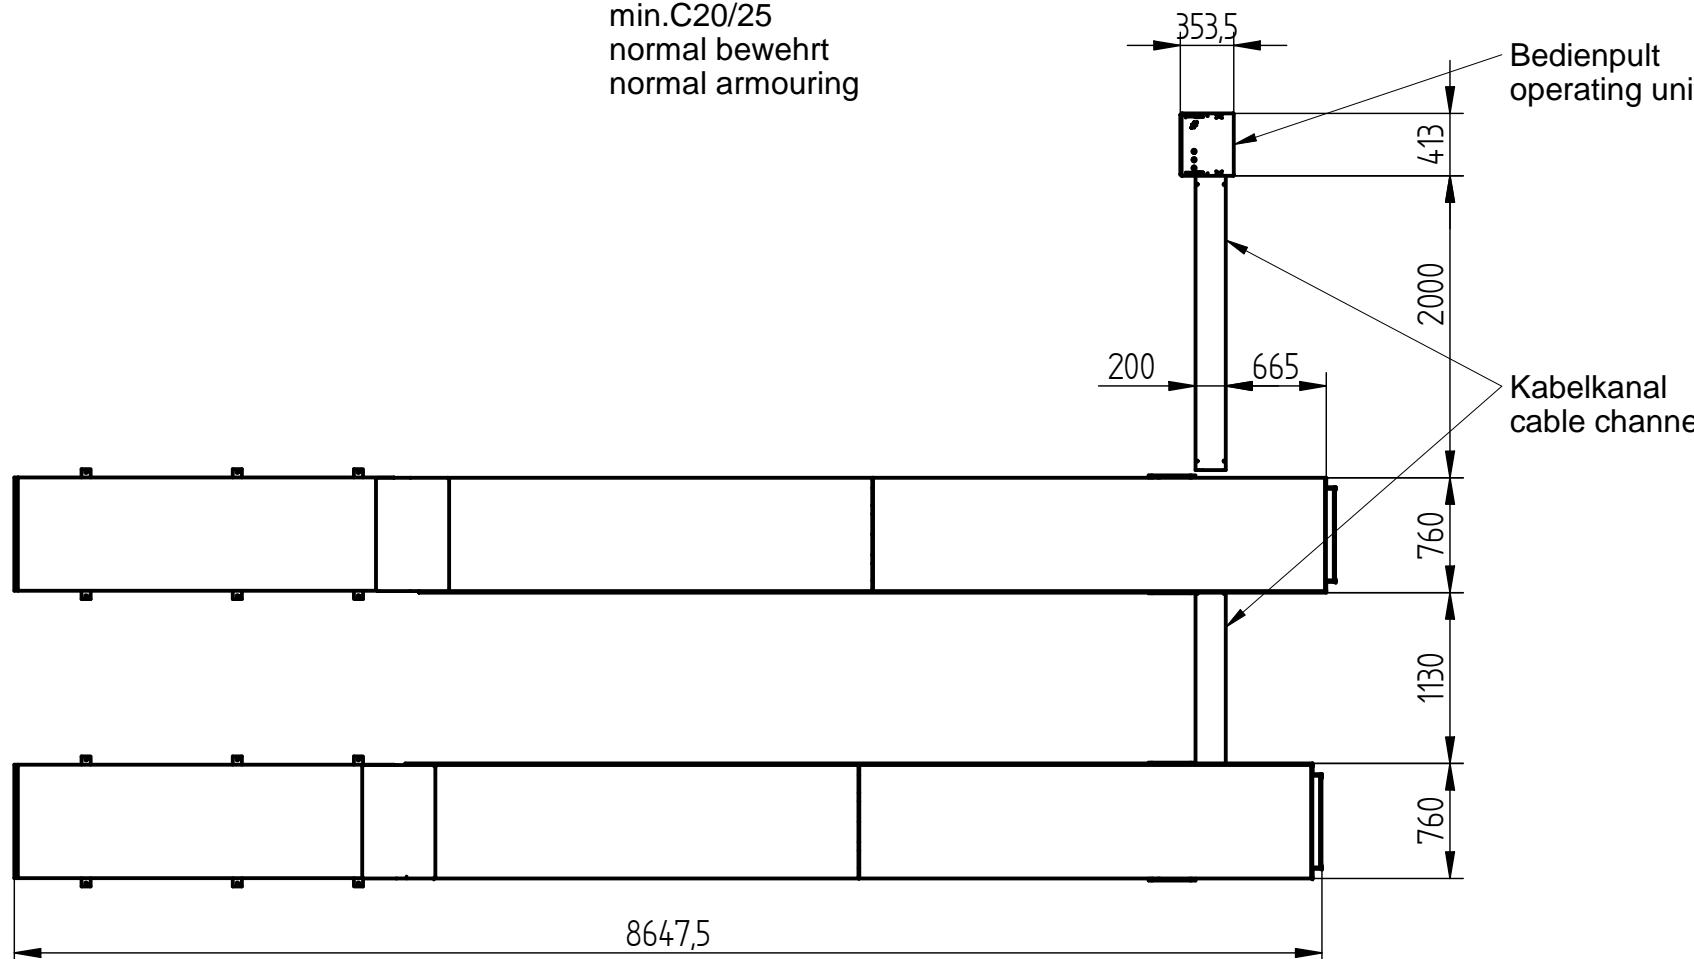

Kabelkanal
cable channel

Bauseits am Bedienpult bereitstellen:
Netzanschluss: 3PH+PE, 400V, 50Hz
Motorleistung: 3,5 kW
Absicherung: 10 Ampere träge
Kabellänge: ca. 2m, 4 x 4mm²

Prepared by customer at the main operating unit:
power supply: 3PH+PE, 400V, 50Hz
Motor power 3,5kW
fuse: 10 Ampere, time lag
cable diameter: 4 x 4mm²
cable length: approx. 2m

Wir weisen in unseren Plänen auf die Mindestanforderung des Fundamentes hin, jedoch der Zustand der örtlichen Gegebenheiten (z.B. Untergrund, Ausführung etc.) obliegt nicht unserer Verantwortung. Die Ausbildung der Einbausituation muss vom planenden Architekten bzw. Statiker im speziellen Fall individuell spezifiziert werden.

We point out the minimum requirement of the foundation in our plans. The condition of the local realities for example: the ground under the foundation) does not lie in our responsibility. The execution of the installation situation must be individually specified by the planning architect or by the engineer engaged in statically calculations in the special case.

Alle Maße in Millimeter
all dimensions in millimeter

Maß- und Konstruktionsänderungen vorbehalten!
subject to alterations!

REV	CO NUM	DATE	BY	UNLESS OTHERWISE NOTED: ANGULAR DIMENSIONS: +/- 1 OTHER DIMENSIONS: +/- 0.8mm (< 305mm) +/- 1.6mm (> or= 305mm)	THIRD ANGLE PROJECTION DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED: 0.8mm MIN. CORNER BREAK REMOVE ALL BURRS	S90-60 Data sheet 
NOTES:	Tragfähigkeit/capacity: 9000 kg			The design and detail illustrated in this drawing is the property of Vehicle Service Group. It is being loaned with the expressed condition that it will not be duplicated or used except by permission and is subject to return upon request.	DRAWN MD. APPROVED	DATE 26.07.2021 DRAWING NUMBER S90-60_059507440
4	FORM A3	3	2	1		