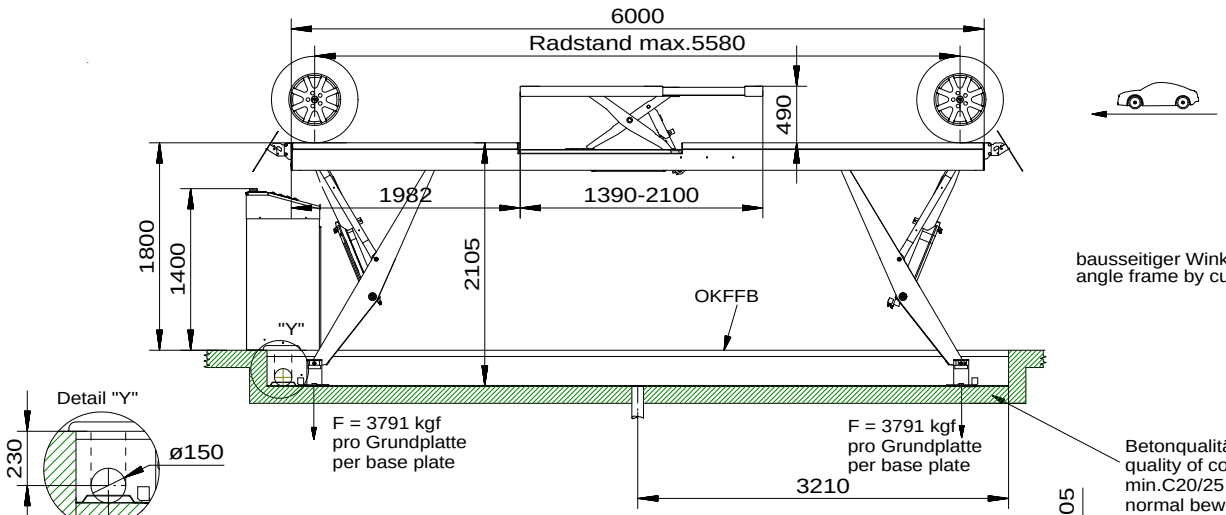



We point out the minimum requirement of the foundation in our plans. The condition of the local realities for example: the ground under the foundation) does not lie in our responsibility. The execution of the installation situation must be individually specified by the planning architect or by the engineer engaged in statically calculations in the special case.

Wir weisen in unseren Plänen auf die Mindestanforderung des Fundamentes hin, jedoch der Zustand der örtlichen Gegebenheiten (z.B. Untergrund, Ausführung etc.) obliegt nicht unserer Verantwortung. Die Ausbildung der Einbausituation muss vom planenden Architekten bzw. Statiker im speziellen Fall individuell spezifiziert werden.



Bauseits am Bedienpult bereitstellen:
Netzanschluss: 3PH,N+PE,400V,50Hz
Motorleistung: 4x 2,6 kW
Absicherung: 32 Ampere träge
Kabelquerschnitt 10 mm²
Kabellänge: ca. 2 m
Druckluft für den Lift und optionalen Achsheber:
Druckluft R3/8" oder Schlauch DN10, 6-8 bar

Prepared by customer at the main operating unit:
power supply: 3PH,N+PE,400V,50Hz
Motor power: 4x 2,6 kW
fuse: 32 Ampere, time lag
cable diameter: 10 mm²
cable length: approx. 2 m
Air pressure for the Lift and optional axle jack:
R3/8" or hose DN10, 6-8 bar

Das Bedienpult kann bei Positionierung auf der rechten Seite mit den Standardschläuchen nur auf max. 1000mm Abstand gestellt werden

The control panel can only positioned on the right side with the standard hoses on max. 1000mm distance

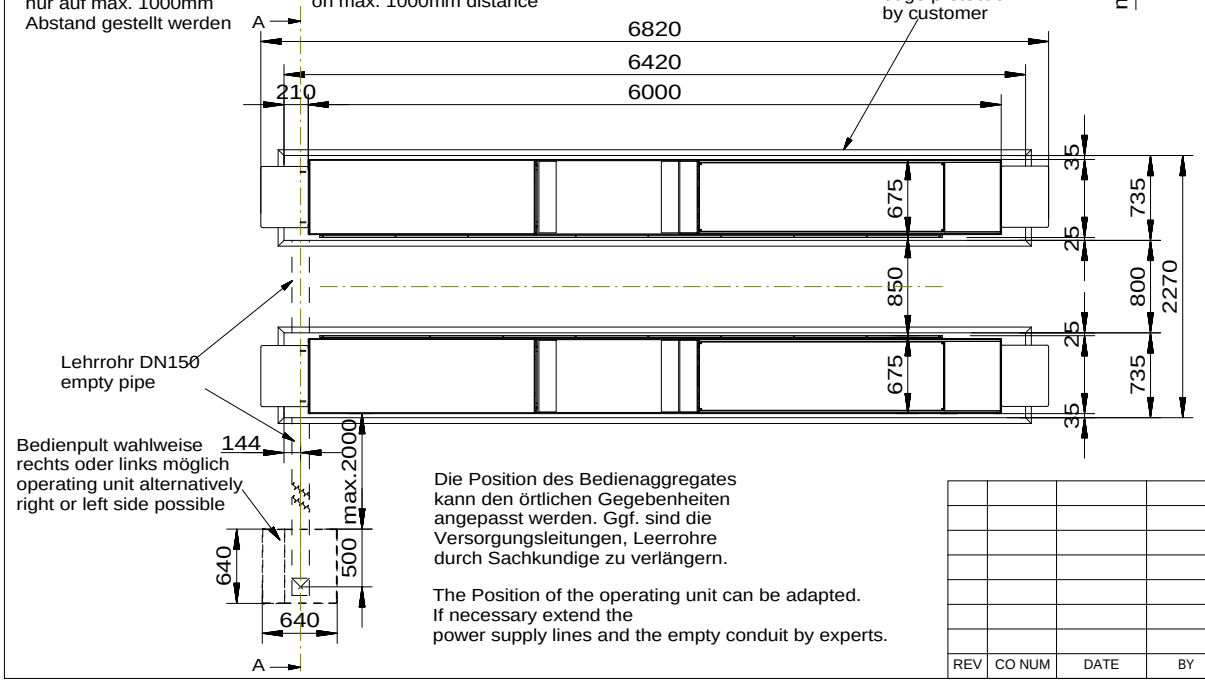

Die Position des Bedienaggregates kann den örtlichen Gegebenheiten angepasst werden. Ggf. sind die Versorgungsleitungen, Leerrohre durch Sachkundige zu verlängern.

The Position of the operating unit can be adapted. If necessary extend the power supply lines and the empty conduit by experts.

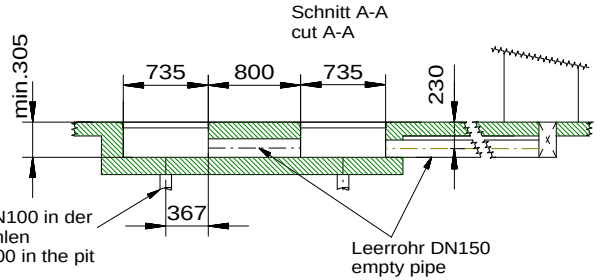

Tragfähigkeit 6500 kg
Lift capacity
Radfreiheber 3500 kg
wheel free lift

Alle Maße in Millimeter
all dimensions in millimeter

Maß- und Konstruktionsänderungen vorbehalten!
subject to alterations!

REV	CO NUM	DATE	BY

UNLESS OTHERWISE NOTED:
ANGULAR DIMENSIONS: +/- 1
OTHER DIMENSIONS: +/- 0.8mm (< 305mm)
+/-1.6mm (> or= 305mm)

THIRD ANGLE PROJECTION
DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED: 0.8mm MIN. CORNER BREAK REMOVE ALL BURRS

NOTES:

The design and detail illustrated in this drawing is the property of Vehicle Service Group.It is being loaned with the expressed condition that it will not be duplicated or used except by permission and is subject to return upon request.

V65LT-60CAT
Streifenfundamentplan
Stripesfoundation plan

DRAWN: MG
DATE: 11.12.2020
SHEET:
DRAWING NUMBER: Vertical-Lift_SFP_V65LT-60CAT-9049
APPROVED: